

SRI LANKA STANDARD 1256: PART 46: 2019
(ISO 4628-4: 2016)
UDC 667.661

**METHODS OF TEST FOR
PAINTS AND VARNISHES
PART 46: DETERMINATION OF DEGREE
OF CRACKING**

SRI LANKA STANDARDS INSTITUTION

Sri Lanka Standard
METHODS OF TEST FOR PAINTS AND VARNISHES
PART 46: DETERMINATION OF DEGREE OF CRACKING

SLS 1256: Part 46: 2019
(ISO 4628-4: 2016)

Gr. H

Copyright Reserved
SRI LANKA STANDARDS INSTITUTION
17, Victoria Place
Elvitigala Mawatha
Colombo - 08
Sri Lanka.

Sri Lanka Standards are subject to periodical revision in order to accommodate the progress made by industry. Suggestions for improvement will be recorded and brought to the notice of the Committees to which the revisions are entrusted.

This Standard does not purport to include all the necessary provisions of a contract

© ISO 2016 - All right reserved.

© SLSI 2019

All right reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the SLSI

Sri Lanka Standard
METHODS OF TEST FOR PAINTS AND VARNISHES
PART 46: DETERMINATION OF DEGREE OF CRACKING

NATIONAL FOREWORD

This Standard was approved by the Sectoral Committee on Chemical and Polymer Technology and authorized for adoption and publication as a Sri Lanka Standard by the Council of the Sri Lanka Standards Institution on 2019-09-11.

The text of the International Standard ISO 4628-4: 2016 Paints and varnishes – Evaluation of degradation of coatings- Designation of quantity and size of defects, and of intensity of uniform changes in appearance Part 4: Assessment of degree of cracking has been accepted for adoption as a Sri Lanka Standard. It specifies a method for assessing the degree of cracking of coatings by comparison with pictorial standards.

This Sri Lanka Standard is identical with ISO 4628-4: 2016 Paints and varnishes – Evaluation of degradation of coatings- Designation of quantity and size of defects, and of intensity of uniform changes in appearance Part 4: Assessment of degree of cracking, published by the International Organization for Standardization (ISO).

TERMINOLOGY AND CONVENTIONS

The text of the International Standard has been accepted as suitable for publication, without deviation, as a Sri Lanka Standard. However, certain terminology and conventions are not identical with those used in Sri Lanka Standards. Attention is therefore drawn to the following:

- a) Wherever the words “International Standard” appear referring to a particular Standards they should be interpreted as “Sri Lanka Standard”.
- b) The comma has been used throughout as a decimal marker. In Sri Lanka Standards it is the current practice to use the full point at the base as the decimal marker.
- c) Wherever page numbers are quoted, they are ISO/IEC page numbers.

Cross References

International Standard	Corresponding Sri Lanka Standard
ISO 13076, Paints and varnishes — Lighting and procedure for visual assessments of coatings	No corresponding Sri Lanka Standards

**Paints and varnishes — Evaluation
of degradation of coatings —
Designation of quantity and size of
defects, and of intensity of uniform
changes in appearance —**

**Part 4:
Assessment of degree of cracking**

*Peintures et vernis — Évaluation de la dégradation des revêtements
— Désignation de la quantité et de la dimension des défauts, et de
l'intensité des changements uniformes d'aspect —*

Partie 4: Évaluation du degré de craquelage





COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Assessment	1
5 Expression of results	2
6 Test report	3
Annex A (informative) Examples for types of cracking	6
Bibliography	15

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 35, *Paints and varnishes*, Subcommittee SC 9, *General test methods for paints and varnishes*.

This third edition cancels and replaces the second edition (ISO 4628-4:2003), which has been technically revised with the following changes:

- a) lower limit for visual assessment of defects has been introduced in [Table 2](#);
- b) a normative reference to ISO 13076 for illumination for the assessment has been added.

ISO 4628 consists of the following parts, under the general title *Paints and varnishes — Evaluation of degradation of coatings — Designation of quantity and size of defects, and of intensity of uniform changes in appearance*:

- *Part 1: General introduction and designation system*
- *Part 2: Assessment of degree of blistering*
- *Part 3: Assessment of degree of rusting*
- *Part 4: Assessment of degree of cracking*
- *Part 5: Assessment of degree of flaking*
- *Part 6: Assessment of degree of chalking by tape method*
- *Part 7: Assessment of degree of chalking by velvet method*
- *Part 8: Assessment of degree of delamination and corrosion around a scribe or other artificial defect*
- *Part 10: Assessment of degree of filiform corrosion*

Paints and varnishes — Evaluation of degradation of coatings — Designation of quantity and size of defects, and of intensity of uniform changes in appearance —

Part 4: Assessment of degree of cracking

1 Scope

This part of ISO 4628 specifies a method for assessing the degree of cracking of coatings by comparison with pictorial standards.

ISO 4628-1 defines the system used for designating the quantity and size of defects and the intensity of changes in appearance of coatings and outlines the general principles of the system. This system is intended to be used, in particular, for defects caused by ageing and weathering, and for uniform changes such as colour changes, for example yellowing.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies

ISO 13076, *Paints and varnishes — Lighting and procedure for visual assessments of coatings*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

degree of cracking

rating characterizing cracks in a coating in terms of quantity, size, and depth

4 Assessment

Assess the quantity of cracking by reference to [Table 1](#) and using as example [Figure 1](#) or [Figure 2](#), depending on the type of cracking.

NOTE [Figure 1](#) shows cracking without preferential direction and [Figure 2](#) shows cracking in one preferential direction, which occurs with substrates such as wood (“anisotropic” substrates). Other forms of cracking occur, but the principles of assessing the quantity remain the same.

Table 1 — Rating scheme for designating the quantity of cracks

Rating	Quantity of cracks
0	none, i.e. no detectable cracks
1	very few, i.e. small, barely significant number of cracks
2	few, i.e. small but significant number of cracks
3	moderate number of cracks
4	considerable number of cracks
5	dense pattern of cracks

If specified, assess the average size of the cracks in accordance with [Table 2](#).

Table 2 — Rating scheme for designating the size of cracks

Rating	Size of cracks
0	not visible under × 10 magnification
1	only visible under magnification up to ×10
2	just visible with normal corrected vision (up to 0,2 mm) ^a
3	clearly visible with normal corrected vision (larger than 0,2 mm up to 0,5 mm)
4	large cracks, larger than 0,5 mm up to 1 mm wide
5	very large cracks generally more than 1 mm wide

^a Typically, defects larger than 0,2 mm are visible with normal corrected vision.

Where the test area exhibits cracks of various sizes, quote as the size rating that of the largest cracks which are numerous enough to be typical of the test area.

If possible, indicate the depth of cracking by reference to the level in the coating system to which the cracks penetrate. A distinction is made between three main types of failure by cracking:

- a) surface cracks which do not fully penetrate the top coat (i.e. checking);
- b) cracks which penetrate the top coat, the underlying coat(s) being substantially unaffected;
- c) cracks which penetrate the whole coating system.

Carry out the assessment under good illumination, as specified in ISO 13076.

5 Expression of results

Express the numerical ratings of the quantity and, if specified, size of the cracks, together with the depth of cracking (a, b, or c), shown in [Figures 1](#) and [2](#) together with the approximate dimensions of the area concerned, or its proportion to the total area, expressed as a percentage.

For example, for quantity 2, size 3 with the cracks penetrating the top coat and the underlying coat(s) are substantially unaffected, report the result as


— cracking; degree of cracking 2(S3)b.

If necessary, the assessment may be amplified in words, for example “cracking in one preferential direction” and by using the descriptions given in [Annex A](#).

6 Test report

The test report shall contain at least the following information:


- a) all details necessary to identify the coating examined;
- b) a reference to this part of ISO 4628, i.e. ISO 4628-4;
- c) the type of surface examined, its size and, if appropriate, its location;
- d) the result of the examination in accordance with [Clause 5](#);
- e) an indication of the illumination under which the assessment was carried out;
- f) any unusual features (anomalies) observed during the assessment;
- g) the date of the examination.

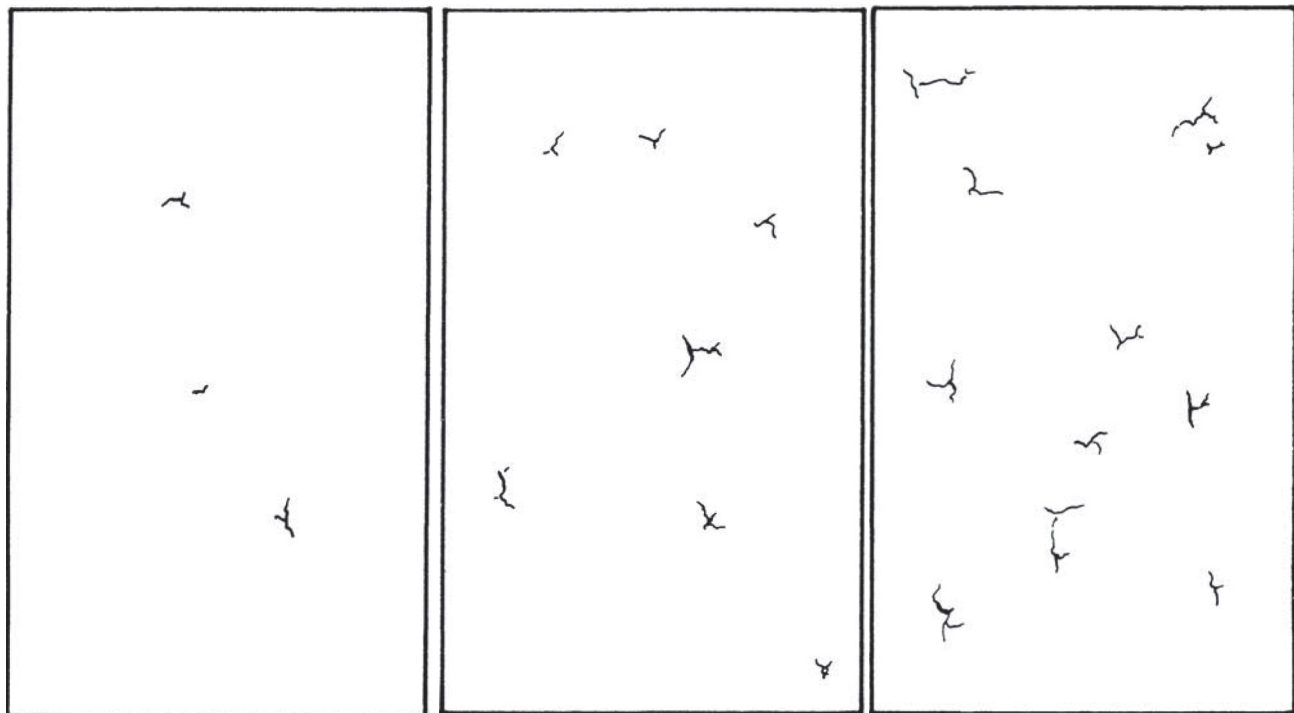


a) Quantity (density) 1

b) Quantity (density) 2

c) Quantity (density) 3

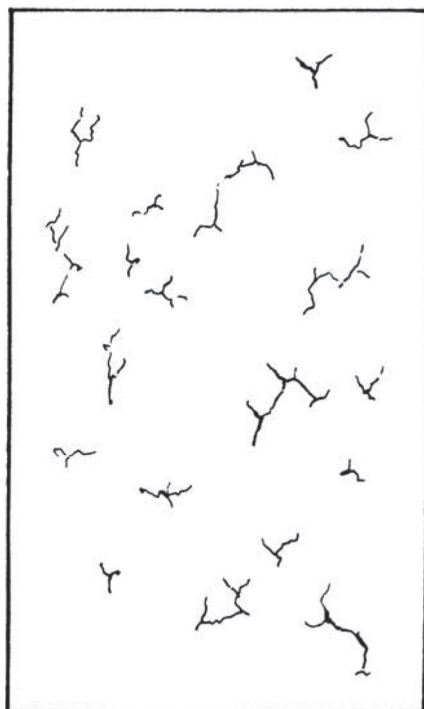


d) Quantity (density) 4

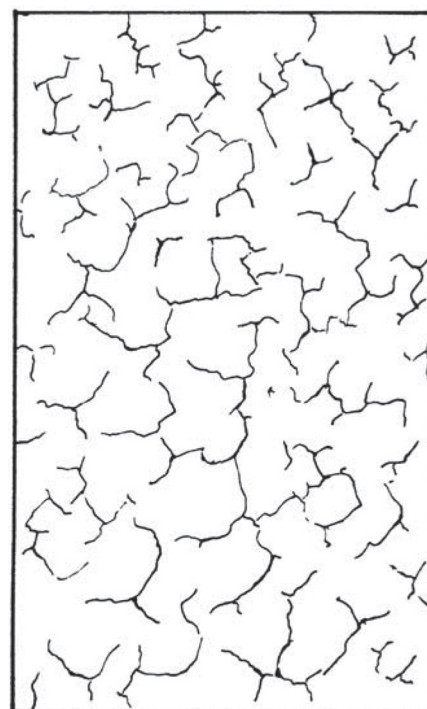

e) Quantity (density) 5


Figure 1 — Cracking without preferential direction (panels of area 100 cm² to 200 cm²)

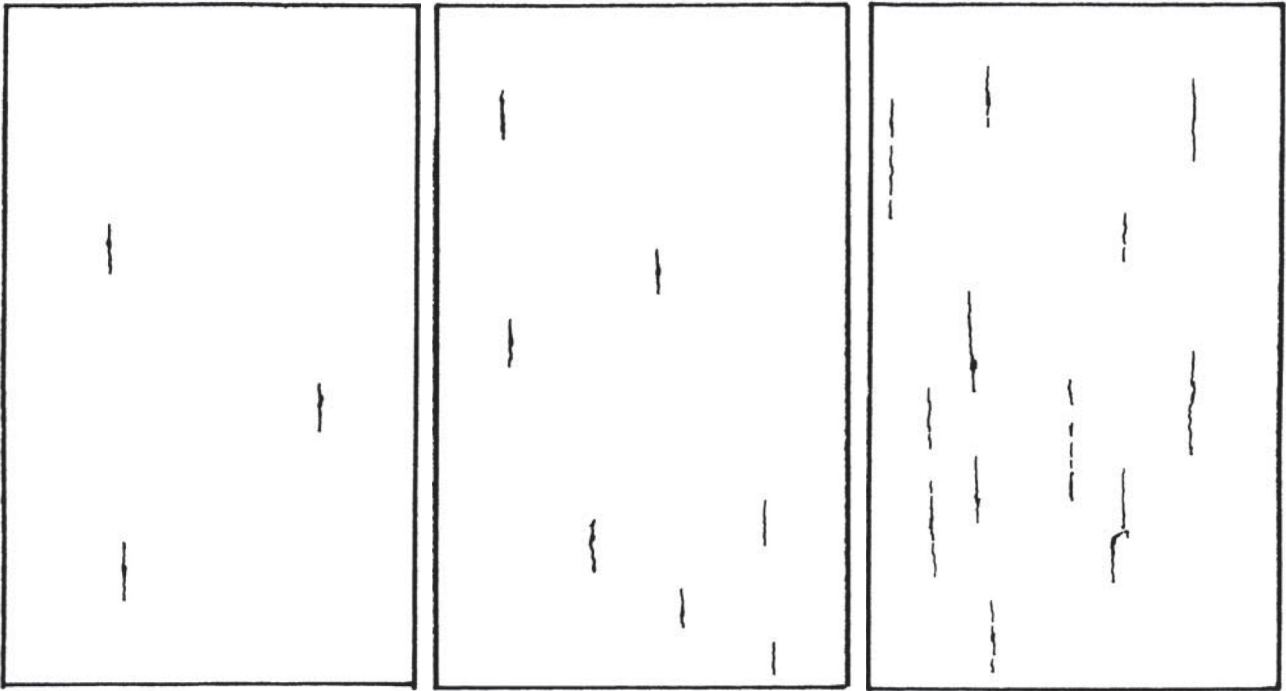

a) Quantity (density) 1

b) Quantity (density) 2

c) Quantity (density) 3

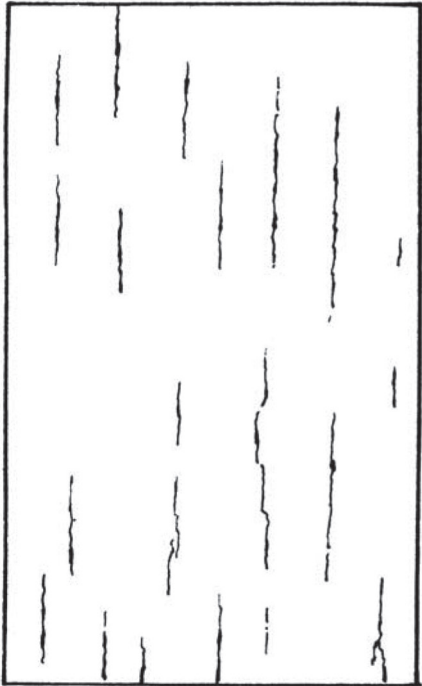

d) Quantity (density) 4



e) Quantity (density) 5


Figure 2 — Cracking in one preferential direction (for example due to brush marks or wood grain) (panels of area 100 cm² to 200 cm²)

Annex A (informative)


Examples for types of cracking

ASTM — American Society for Testing and Materials


TNO — Nederlandse Organisatie voor Toegepast Natuurwetenschappelijk Onderzoek (Netherlands Organization for Applied Scientific Research)

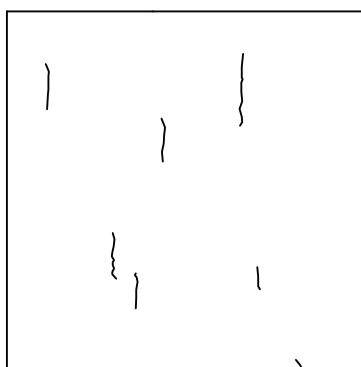


ASTM 8
TNO 2

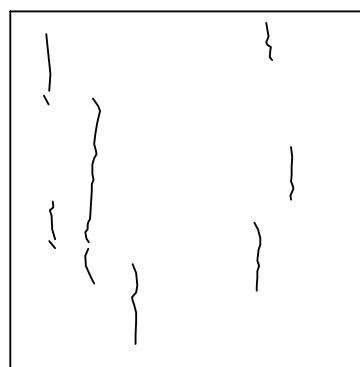

ASTM 6
TNO 4

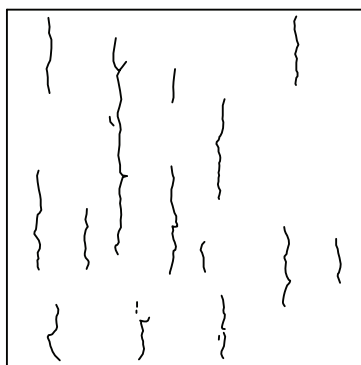


ASTM 4
TNO 6

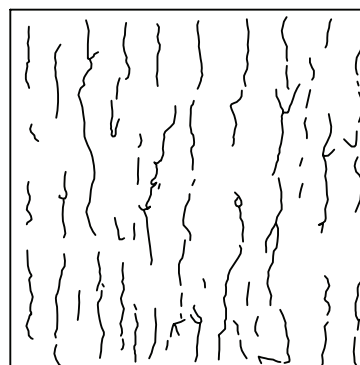


ASTM 2
TNO 8


Figure A.1 — Irregular

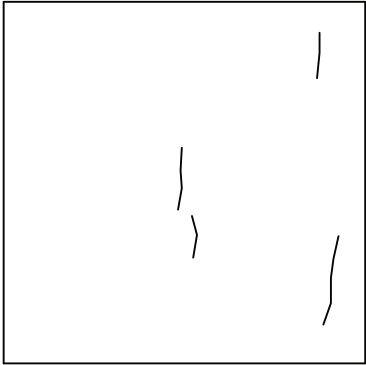


ASTM 8
TNO 2

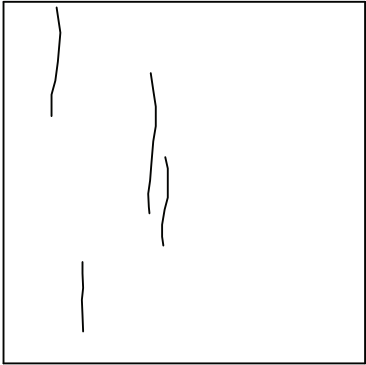

ASTM 6
TNO 4

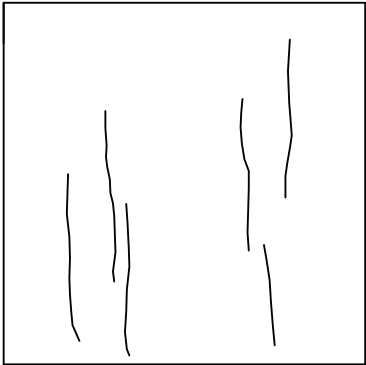


ASTM 4
TNO 6

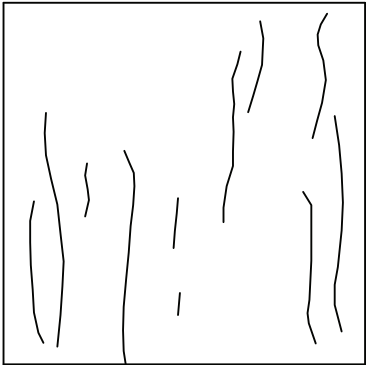


ASTM 2
TNO 8


Figure A.2 — Long line

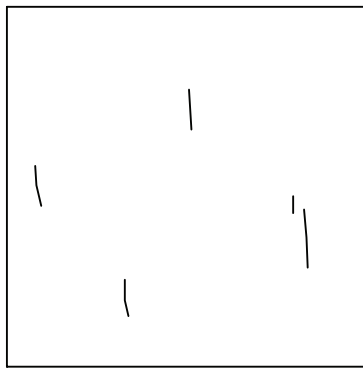


ASTM 8
TNO 2

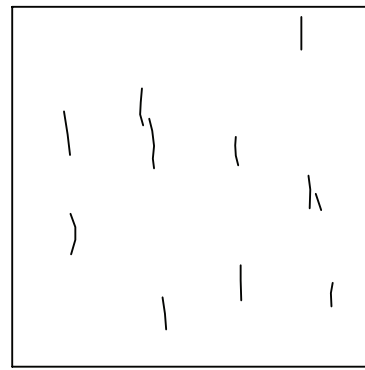

ASTM 6
TNO 4

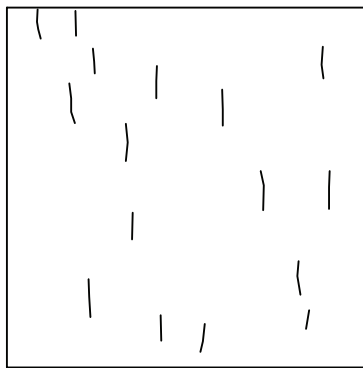


ASTM 4
TNO 6

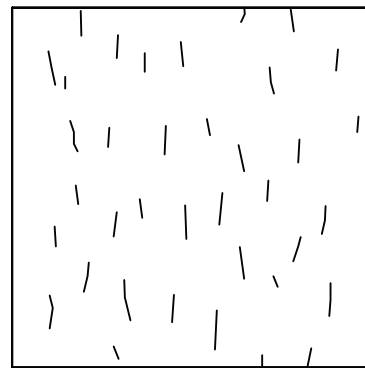


ASTM 2
TNO 8

Figure A.3 — Short parallel

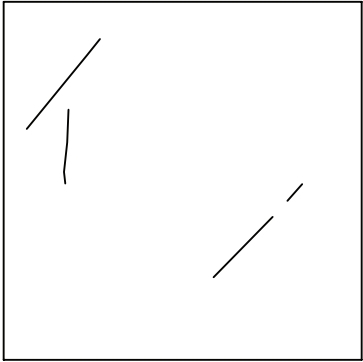

ASTM 8
TNO 2

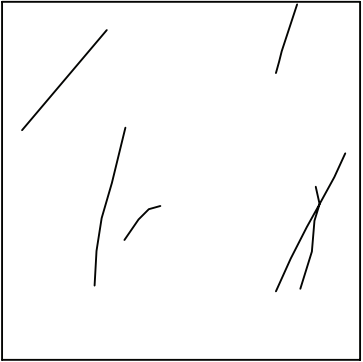

ASTM 6
TNO 4




ASTM 4
TNO 6




ASTM 2
TNO 8


Figure A.4 — Switch

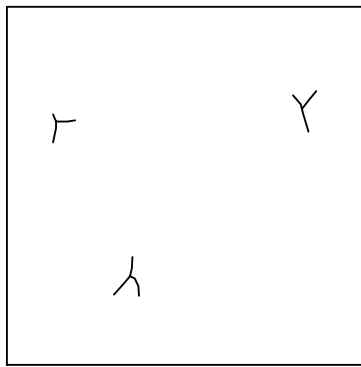


ASTM 8
TNO 2

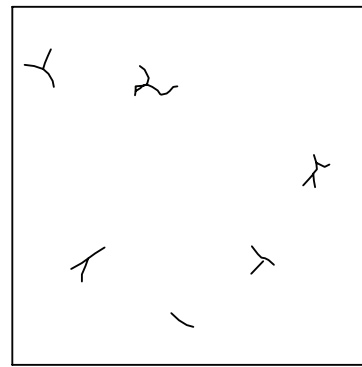

ASTM 6
TNO 4

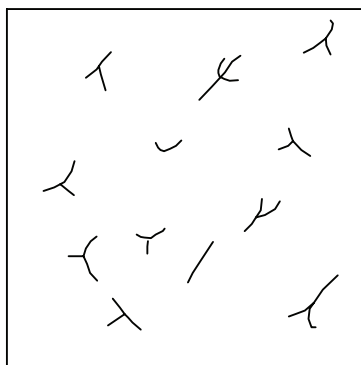


ASTM 4
TNO 6

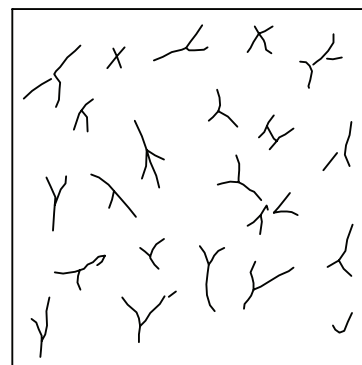


ASTM 2
TNO 8


Figure A.5 — Crow foot

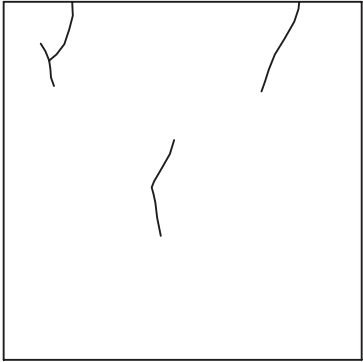


ASTM 8
TNO 2

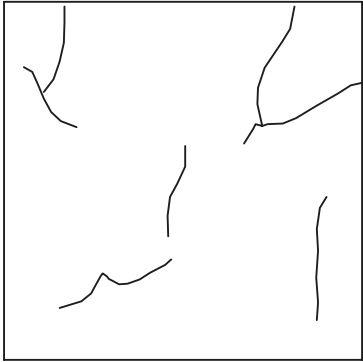

ASTM 6
TNO 4

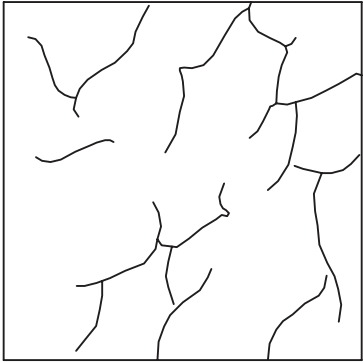


ASTM 4
TNO 6

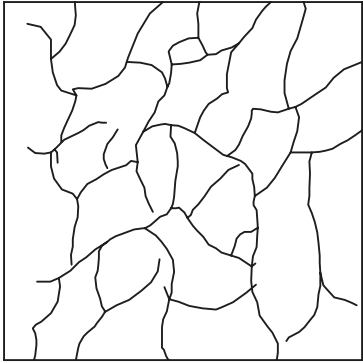


ASTM 2
TNO 8


Figure A.6 — Mosaic

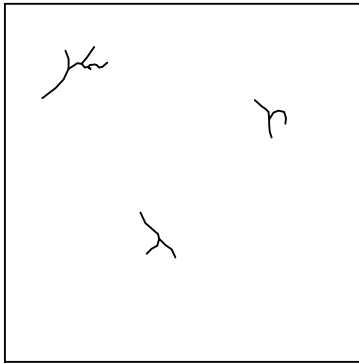


ASTM 8
TNO 2

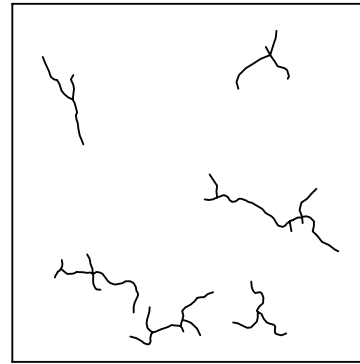

ASTM 6
TNO 4

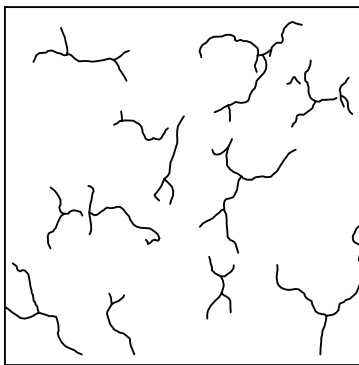

ASTM 4
TNO 6

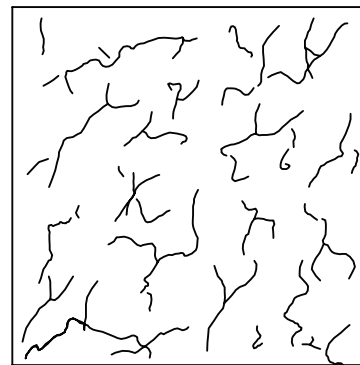

ASTM 2
TNO 8

Figure A.7 — Shrinkage



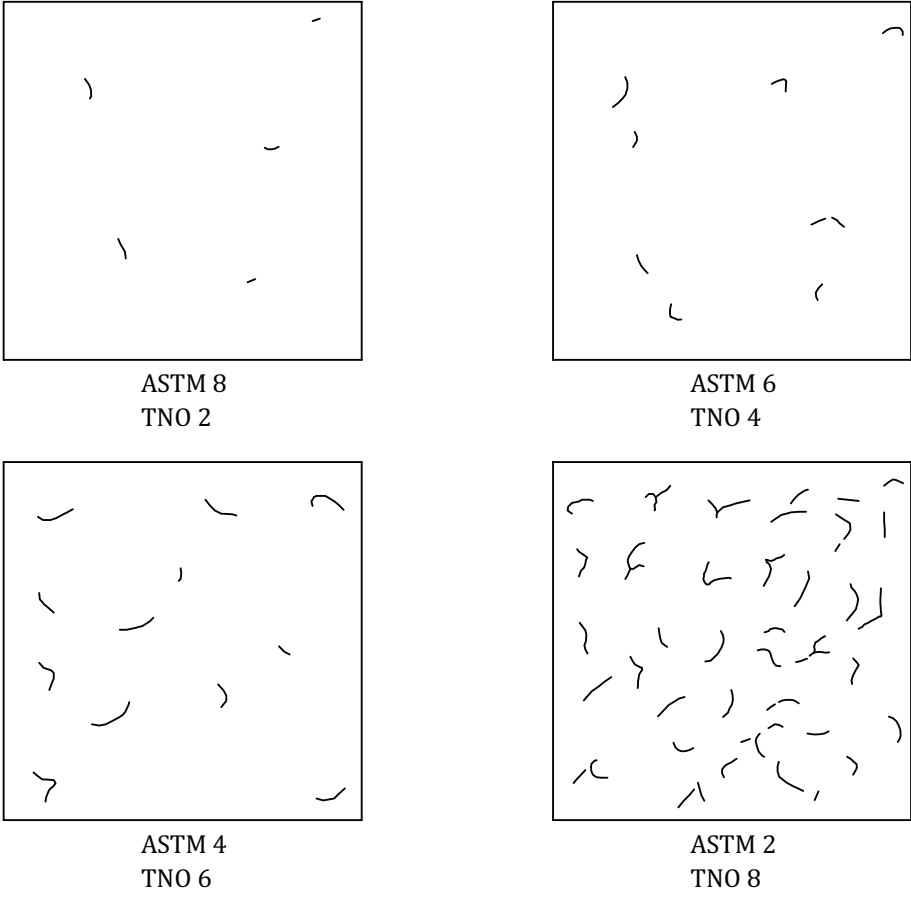



Figure A.8 — Short, random

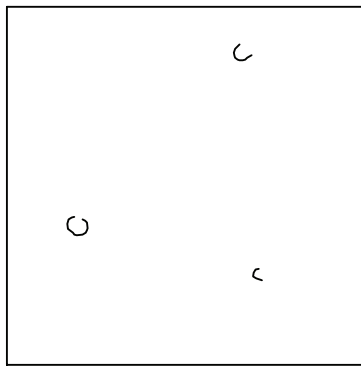


ASTM 8
TNO 2

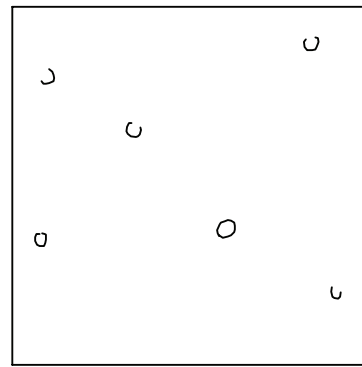

ASTM 6
TNO 4

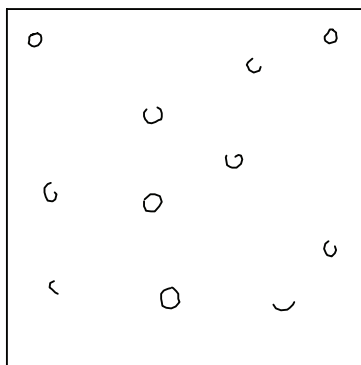

ASTM 4
TNO 6

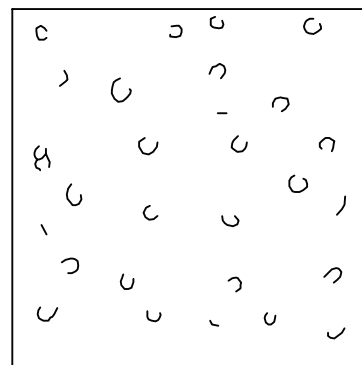

ASTM 2
TNO 8

Figure A.9 — Sigmoid

Bibliography

- [1] ISO 4628-1, *Paints and varnishes — Evaluation of degradation of coatings — Designation of quantity and size of defects, and of intensity of uniform changes in appearance — Part 1: General introduction and designation system*

SLS CERTIFICATION MARK

The Sri Lanka Standards Institution is the owner of the registered certification mark shown below. Beneath the mark, the number of the Sri Lanka Standard relevant to the product is indicated. This mark may be used only by those who have obtained permits under the SLS certification marks scheme. The presence of this mark on or in relation to a product conveys the assurance that they have been produced to comply with the requirements of the relevant Sri Lanka Standard under a well designed system of quality control inspection and testing operated by the manufacturer and supervised by the SLSI which includes surveillance inspection of the factory, testing of both factory and market samples.

Further particulars of the terms and conditions of the permit may be obtained from the Sri Lanka Standards Institution, 17, Victoria Place, Elvitigala Mawatha, Colombo 08.



SRI LANKA STANDARDS INSTITUTION

The Sri Lanka Standards Institution (SLSI) is the National Standards Organization of Sri Lanka established under the Sri Lanka Standards Institution Act No. 6 of 1984 which repealed and replaced the Bureau of Ceylon Standards Act No. 38 of 1964. The Institution functions under the Ministry of Science & Technology.

The principal objects of the Institution as set out in the Act are to prepare standards and promote their adoption, to provide facilities for examination and testing of products, to operate a Certification Marks Scheme, to certify the quality of products meant for local consumption or exports and to promote standardization and quality control by educational, consultancy and research activity.

The Institution is financed by Government grants, and by the income from the sale of its publications and other services offered for Industry and Business Sector. Financial and administrative control is vested in a Council appointed in accordance with the provisions of the Act.

The development and formulation of National Standards is carried out by Technical Experts and representatives of other interest groups, assisted by the permanent officers of the Institution. These Technical Committees are appointed under the purview of the Sectoral Committees which in turn are appointed by the Council. The Sectoral Committees give the final Technical approval for the Draft National Standards prior to the approval by the Council of the SLSI.

All members of the Technical and Sectoral Committees render their services in an honorary capacity. In this process the Institution endeavours to ensure adequate representation of all view points.

In the International field the Institution represents Sri Lanka in the International Organization for Standardization (ISO), and participates in such fields of standardization as are of special interest to Sri Lanka.